

EQUITONE [natura] PRO Material Information Sheet

1. Product Appearance

EQUITONE [natura]PRO is a high-density fiber cement panel with a through-colored core and a colored semi-transparent double-layer acrylic finish which results in the structure (fibers) of the material shining through.

The surface finish is matt with a UV-hardened PU topcoat (front side), providing a hard, dirt-resistant surface finish with high abrasion resistance and permanent and durable graffiti protection.

Irregularities, differences in shade, and traces of the manufacturing process are part of the natural characteristics of the material. The rear receives a transparent back-sealing coating.

2. Color

EQUITONE [natura] PRO is available in a wide range of standard and special colors, manufactured based on various through-colored core/baseboards as shown on the color chart below.

Color variations are part of the natural characteristics of the material. The allowable tolerance of shade between the EQUITONE [natura] PRO materials is minimal and is measured according to the CIELAB color model. The allowable dry mean averages of three readings are ΔL (brightness) of ± 2.0 , Δa (+red/-green) of ± 1.0 , and Δb (+yellow/-blue) of ± 1.0 compared to the production benchmark sample and measured with the same device.

Available colors




Note: It is not possible to realistically show available colors in literature, therefore the final choice of colors should be made with samples. Please order your samples on the website www.equitone.com.

3. Product Composition

EQUITONE[natura]PRO panels consist of cement, water, mineral fillers, cellulose fibers, synthetic reinforcing fibers, inorganic color pigments (depending on the color), an acrylic coating, and a UV-cured functional top layer.

4. Production Method

EQUITONE [natura]PRO is a highly compressed, air-cured fiber cement material manufactured in Germany (Europe).

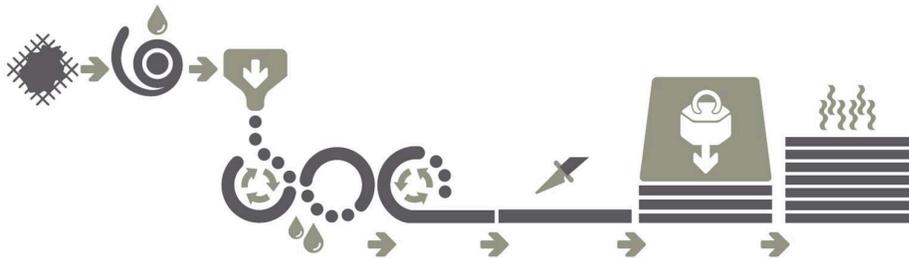

EQUITONE [natura] PRO panels are manufactured through the Hatschek process where the base materials which are mainly cement, fibers, cellulose, pigments, and water are first mixed together to form a slurry. This slurry is then pumped into several vats with rotating cylindrical sieves on the surface of which a film of fiber cement is formed through a sieving mechanism as they rotate, which is then transferred to a felt belt traveling overhead. This thin layer of fiber cement is then dewatered before being transferred via the felt belt to a forming drum on which several layers of fiber cement are collected and squeezed together until the required thickness is achieved. Once this occurs, this fresh sheet of fiber cement is cut by an automatic cutting knife. A conveyor then transports the sheet to where all the sheets are stacked with an interleaving steel plate. The stacked sheets are then highly compressed, resulting in a high-density material.

This is followed by a curing process where the panels harden under ambient temperature and without vapor pressure.

Subsequently EQUITONE [natura] PRO receives an industrially applied multiple-layer coating on the front face, and a physically equivalent sealing coating on the rear face. Finally, a UV-hardened PU topcoat is applied to the front side.

In case of factory-trimmed panels the edges are trimmed and additionally sealed with Luko edge sealer.

5. Dimensions and Tolerances (Imperial)

EQUITONE [natura] PRO is available in a standard thickness of 5/16" and in 15/32" thicknesses for specific applications or fixings. The panels are available in either untrimmed (production dimension) or trimmed (maximum usable size) formats.



The panel must not be installed with untrimmed edges. Approximately 19/32" needs to be trimmed from each of the untrimmed (raw) edges. Cut edges need to be sealed with Luko edge sealer.

Dimensions

Thickness	5/16 in	15/32 in
-----------	---------	----------

Width

Trimmed	49 in
Untrimmed	50 in

Length

Trimmed	98 in or 122 in
Untrimmed	99 1/2 in or 123 in

Tolerances¹ (for cut and trimmed panels)

Thickness	± 0.0236 in	± 0.0354 in
Width	± 0.0394 in	
Length	± 0.0394 in	
Squareness	± 0.0394 in/ft	

Tolerances¹ (for untrimmed panels)

Thickness	± 0.0236 in	± 0.0354 in
Width	± 1/4 in	
Length	± 5/16 in	
Squareness	± 0.0394 in/ft	

Weight per m² (air dry)

	3.15lb/ft ²	4.67lb/ft ²
--	------------------------	------------------------

Weight per panel (without pallet)

98 x 49 in (trimmed)	106lb	157lb
122 x 49 in (trimmed)	132lb	195lb
99 1/2 x 50 in (untrimmed)	110lb	163lb
123 x 50 in (untrimmed)	136lb	202lb

Packaging		
Number of panels on a pallet	30	20

Usable surface per pallet		
98 x 49 in (trimmed)	1010 ft ²	673 ft ²
122 x 49 in (trimmed)	1250 ft ²	834 ft ²

Color tolerance (CIELAB) 2		
ΔL^* , brightness		± 2.0
Δa^* , + red/ - green		± 1.0
Δb^* , + yellow/ - blue		± 1.0

¹ Factory tolerances for trimmed and untrimmed panels outperform the requirements of the EN 12467 Level I and II dimensional tolerances, respectively; as well as all criteria set forth on ASTM C1185.

² Color tolerance are only to be measured on dry surfaces.

³ Imperial values are approximate and are based on the metric values.

5.1 Dimensions and Tolerances (Metric)

EQUITONE [natura] PRO is available in a standard thickness of 8mm and in 12 mm thicknesses for specific applications or fixings. The panels are available in either untrimmed (production dimension) or trimmed (maximum usable size) formats.



The panel must not be installed with untrimmed edges. Approximately 15 mm needs to be trimmed from each of the untrimmed (raw) edges. Cut edges need to be sealed with Luko edge sealer.

Dimensions		
Thickness	8 mm	12 mm

Width	
Trimmed	1250 mm
Untrimmed	1280 mm

Length	
Trimmed	2500 mm or 3100 mm
Untrimmed	2530 mm or 3130 mm

Tolerances ¹ (for cut and trimmed panels)		
Thickness	± 0.6 mm	± 0.9 mm
Width	± 1 mm	
Length	± 1 mm	
Squareness	± 1.0 mm/m	

Tolerances ¹ (for untrimmed panels)		
Thickness	± 0.6 mm	± 0.9 mm
Width	± 6 mm	
Length	± 8 mm	
Squareness	± 1.0 mm/m	

Weight per m ² (air dry)		
	15.4kg/m ²	22.8kg/m ²

Weight per panel (without pallet)		
2500 x 1250 mm (trimmed) 3100	48.1kg	71.3kg
x 1250 mm (trimmed) 2530 x	59.7kg	88.4kg
1280 mm (untrimmed) 3130 x	49.9kg	73.8kg
1280 mm (untrimmed)	61.7kg	91.4kg

Packaging		
Number of panels on a pallet	30	20

Usable surface per pallet		
2500 x 1250 mm (trimmed)	93.75 m ²	62.5 m ²
3100 x 1250 mm (trimmed)	116.25 m ²	77.5 m ²

Color tolerance (CIELAB) 2		
ΔL^* , brightness		± 2.0
Δa^* , + red/ - green		± 1.0
Δb^* , + yellow/ - blue		± 1.0

¹Factory tolerances for trimmed panels outperform the requirements of the EN 12467 Level I dimensional tolerances.

²Color tolerance are only to be measured on dry surfaces.

6. Material Properties (ASTM)



Classification				
Flexural strength classification		ASTM	Grade III	
Dimensional tolerances for trimmed panels		C1186	Pass	
		ASTM		
Physical requirements and characteristics				
		C1186		
Mean density	dry	ASTM C1185	111.8	lb/ft ³
Moisture movement	30-90 %	ASTM C1185	≤0.1	%
Flexural strength ultimate ¹	dry	ASTM C1185	3,358	psi
Flexural strength ultimate ¹	wet	ASTM C1185	2,160	psi
Water tightness		ASTM C1186	Pass	
Moisture content		ASTM C1185	3.9	%
Durability requirements				
Frost resistance (freeze/thaw)		ASTM C1186	Pass	
Warm water resistance test		ASTM C1186	Pass	
Mean water absorption		ASTM C1185	14.5	%
Fire and safety				
Material burning characteristics		ASTM E84	Class A	
Flame spread index			0	
Smoke development index			0	
Assembly fire resistance rating		ASTM E119	1	hr.
Hose stream test		ASTM E119	Pass	
Vertical tube furnace (B)		ASTM E136	Pass, Non-combustible	
Other characteristics				
Thermal movement	α	-	5.5e-6	in/in°F
Thermal conductivity	λ	ASTM C518	0.236	BTU/h ft°F

Notes:

1. Appropriate safety factors should be applied to ultimate values.
2. EQUITONE [natura] PRO cladding panels strength classification conforms to the requirements of ASTM C1186 "Standard Specifications for Flat Fiber-Cement Panels."
3. EQUITONE [natura] PRO cladding panels have been evaluated per ICC acceptance criteria AC90 to meet the minimum requirements of the International Building Code (IBC).
4. Results are in accordance with the procedures defined in ASTM C1185 "Standard Test Methods for Sampling and Testing Non-Asbestos Fiber-Cement Flat Sheet, Roofing and Siding Shingles, and Clapboards."

6.1 Material Properties (EN)

EQUITONE [natura] PRO cladding panels conform to the requirements of EN 12467:2012+A1:2018 “Fiber cement flat sheets – Product specification and test methods.” The results below are presented as defined by the standard.

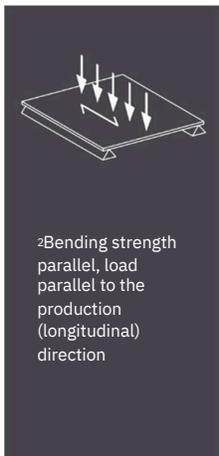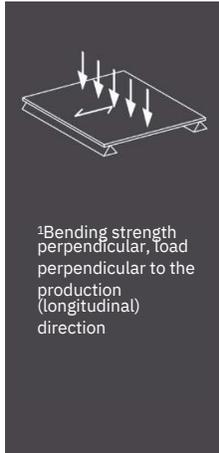

Classification			
Type of product	EN 12467	NT	
Durability classification	EN 12467	Category A	
Strength classification	EN 12467	Class 4	
Dimensional tolerances for trimmed panels	EN 12467	Level I	
Dimensional tolerances for untrimmed panels	EN 12467	Level II	

Physical requirements and characteristics				
Mean density				
Characteristic dead load gk (8 mm)	dry	EN 12467	1750	kg/m ³
Characteristic dead load gk (12 mm)	-	-	0.17	kN/m ²
Moisture movement	-	-	0.26	kN/m ²
Characteristic bending strength perp.1	30-90 %	EN 12467	≤0.1	%
Characteristic bending strength par.2	ambient	EN 12467	24.0	MPa
Partial safety factor γ_m^3	ambient	EN 12467	18.5	MPa
Mean module of elasticity	ambient	-	2.0	-
Water impermeability test	ambient	EN 12467	12,000	MPa
		EN 12467	No drops/Pass	

³ Recommendation for the safety concept according to the Eurocode standard if no national regulation exists.

Freeze-thaw test for Category A panel		
Heat-rain tests for Category A panel		
Warm water test	EN 12467	Pass
Soak-dry test	EN 12467	Pass
	EN 12467	Pass

Fire and safety		
Material fire classification	EN 13501	A2-s1,d0
Flame spread rating	ULC S102	0
Smoke development classification	ULC S102	5
Material combustibility	ULC S114	Non-combustable

Other characteristics				
Thermal movement	α	-	0.01	mm/mK
Thermal conductivity	λ	ASTM C518	0.407	W/mK
Moisture content at 20°C, 65 % humidity		-	<6	M.-%
Brinell surface hardness (HBWmean)		ISO6506-1	75	N/mm ²
Poisson's ratio	ν	-	0.2	-

Note to the units: 1 K (degree Kelvin) = 1°C, 1 MPa (Mega Pascal) = 1 N/mm², M.-% = mass percentage

Note: EQUITONE [natura] PRO panels also comply with the requirements of ISO8336:2017 “Fiber-cement flat sheets – Product specification and test methods.”

The EQUITONE [natura] PRO surface has the following properties:

- Oesterle scratch resistance 2.5 N
- Mohs hardness 4
- Pencil hardness 4H
- Indentation test 6 N according to DIN 53153, EN ISO 2815

The UV-hardened surface coating is smooth and easy to clean. It offers high protection against normal and spray paints. The anti-graffiti coating satisfies the placement test requirements and those of Test Cycle 2 of the quality control association Gütegemeinschaft Anti-Graffiti e.V. for protective anti-graffiti surface systems (ILF test report 4-013/2006 of the Institut für Lacke und Farben e.V.). Graffiti can be removed with the usual graffiti cleaning agents available in the trade.

7. Advantages

Providing the application guidelines are followed, EQUITONE [natura] PRO fiber-cement panels have the following superior mix of properties compared to other materials:

- Recyclable according to Environmental Product Declaration (EPD)
- Expected average reference service life of 50 years (based on EPD)
- Fire safe (no fire ignition, no spread of fire)
- Improved sound insulation of the facade
- UV-resistant
- Resistant to extreme temperatures and frost
- Weather resistant
- Resistant to many living organisms (fungi, bacteria, insects, vermin, etc.)
- Resistant to many chemicals
- Material appearance due to transparent coating
- Strong, rigid panels
- Hail impact tested
- Permanent and durable graffiti protection.

Working with the material:

- The material is easy to drill, cut, and install with the proper tools
- Do not use adhesive, tapes, and/or sealants on the finished surfaces of the material

8. Applications

EQUITONE [natura] PRO can be used in several ventilated applications, including, but not limited to:

- Ventilated facade / rainscreen cladding
- Window and door reveal
- Exterior ceiling: decorative cladding of ceiling
- Soffits, eaves, and verge boards
- Interior wall and ceiling lining (subject to local regulations)
- Roof applications or inclined facades with panels facing up

For restrictions on the above-mentioned applications read the specific application guidelines.

The panels may be face or concealed-fixed with Etex proprietary or recommended fixing solutions.

EQUITONE [natura] PRO cannot be used in the following applications, but not limited to: Internal applications exposed to direct moisture e.g. wet areas, situations with direct contact with standing snow or ice, applications where exposed to long-term temperatures exceeding 80°C / 176°F.

9. Health and Safety Aspects

During the mechanical machining of panels, dust can be released which can irritate the airways and eyes. Depending on the working conditions, adequate machinery with dust extraction and/or ventilation should be foreseen. The inhalation of fine (respirable size) quartz-containing dust, particularly when in high concentrations or over prolonged periods of time can lead to lung disease and an increased risk of lung cancer. For more information, please visit www.equitone.com for the most recent Safety Information Sheet.

10. Maintenance and Cleaning

Refer to the relevant "EQUITONE Cleaning Information" Guide.

11. Certification



The manufacturer can - within the framework of the European Regulation N° 305/2011 (CPR) - present the Declaration of Performance (DOP) of the product such confirming that the product has a CE marking. The CE marking guarantees that the product is in accordance with the basic requirements determined by the harmonized European standard and applicable to the product. The Declaration of Performance is presented in accordance with the CPR and can be found at www.equitone.com.

EQUITONE [natura] PRO is certified with an Environmental Product Declaration according to ISO 14025 or EN 15804. The life cycle assessment includes raw material and energy production, the actual manufacturing phase, and the use phase of the fiber cement panels. More information is available in the Material Sustainability Datasheet.

EQUITONE fiber cement façade materials have also achieved a cradle-to-cradle bronze rating according to C2CPII version 3.1. The cradle-to-cradle product innovation institute evaluates products based on five categories: material health, product circularity, clean air and carbon, water and soil stewardship, and social fairness. More information can be found at www.equitone.com.

EQUITONE air-cured products are certified with an ESR report according to ICC AC90. AC90 evaluates the physical properties, weather resistance, wind load resistance, durability, and fire resistance of fiber cement products for use as exterior siding. More information is available in the ESR 3910 report.

The manufacturing facility holds the latest versions of the following ISO certificates

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System
- ISO 45001 Occupational Health and Safety
- ISO 50001 Energy Management System

12. Information



Please visit www.equitone.com for contact details, further information, and technical documents.

Disclaimer

The information in this document is correct at the time of issuing. However, due to our committed program of continuous material and system development, we reserve the right to amend or alter the information contained therein without prior notice. Please visit www.equitone.com to ensure you have the most current version. All figures contained in this document are illustrations and should not be used as construction drawings. This information is supplied in good faith and no liability can be accepted for any loss or damage resulting from its use. This document is protected by international copyright laws. Reproduction and distribution in whole or in part without prior written permission is strictly prohibited. EQUITONE and logos are trademarks of Etex NV or an affiliate thereof. Any use without authorization is strictly prohibited and may violate trademark laws.



www.equitone.com

USA/Canada
1731 Fred Lawson Dr. Maryville TN, 37801
Tel: +1 865 268 0654
E-mail: info.usa@equitone.com
www.equitone.com/en-us/
www.equitone.com/en-ca/